







Founded 1998

Employees **340**

Locations

Revenues (TOPTICA Group) **76 Mio €**

up)

90 Mio \$
Presidents

Dr. Wilhelm Kaenders Dr. Thomas Renner Munich Berlin Farmington, NY Boulder, CO Tokyo Shanghai Beijing

Legal Form
Aktiengesellschaft (AG)
privately owned

Key Technologies

Single Mode & Single Frequency Lasers Tunable Diode Lasers Ultrafast Fiber Lasers Terahertz Systems Frequency Combs



SINGLE MODE & SINGLE FREQUENCY LASERS


IDEAL FOR

Confocal Microscopy
TIRF, STORM, SIM, SD, SPIM
Flow Cytometry
Metrology
Semicon Inspection
Microlithography
Holography/AR/VR
Interferometry
Raman Microscopy


TOPTICA's single-mode diode lasers come with diffraction limited TEM₀₀ output and reliable spectral properties, as well as optional robust fiber coupling. Compact design and low power consumption make them superior to inefficient gas lasers. Multilaser engines seamlessly


integrate several wavelengths into true one-box laser systems.

Single Mode Lasers (TEM₀₀)



Single Frequency Lasers (> 100 m coherence length, TEM,)





iBeam smart

- · Single mode, TEM
- · 375 nm .. 1060 nm
- · Up to 300 mW
- · CW .. 250 MHz dig. Mod.
- · FINE Noise reduction



iChrome CLE, MLE, FLE

- · Up to 7 colors from one box
- · 405 nm .. 640 nm
- · Up to 100 mW per color
- · One or two SM/PM fiber(s)
- · COOLAC automatic alignment



Coherent RGB Lasers

- · Single frequency, TEM
- · 405 nm .. 785 nm
- · Up to 1000 mW
- · > 100 m coherence
- · Ideal gas laser replacement



Deep UV Lasers

- · Single frequency, TEM
- · 193, 213, 257, 266 nm
- Up to 300 mW
- · Pure cw operation
- · Superior Lifetime


TUNABLE DIODE LASERS

IDEAL FOR

Quantum Sensing & Metrology
Quantum Computing
Quantum Simulation
Quantum Communication
Laser Cooling & Trapping
Rydberg Excitation
Quantum Dots & Microcavities
Spectroscopy
LIDAR Seeding
Astronomy & Geology

Narrow linewidth, extremely low noise and great ease of use are the key attributes of TOPTICA's tunable diode lasers. They are available with wavelengths ranging from the deep UV to the mid IR (< 190 nm - 4000 nm), which is the widest spectral coverage on the market. All of TOPTICA's tunable diode

lasers are driven by the same, all-digital platform: One controller for all wavelengths. It combines the best performance with convenient and intuitive local and remote operation. TOPTICA's portfolio for cutting-edge research and applications is complemented by a broad range of intelligent locking solutions for frequency stabilization to external references. Everything from one source.

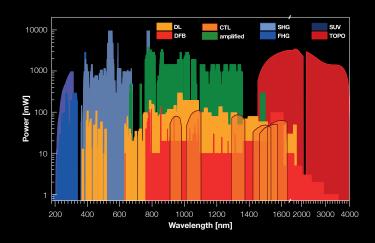



Direct Diode Lasers

- · ECDL and DFB lasers from 369 nm .. 3500 nm
- · Amplified diode lasers up to 4000 mW
- · Mode-hop-free tuning up to 120 nm
- · Linewidth down to < 10 kHz



Frequency-Converted Lasers

- Automatic optimization and stabilization
- · 190 nm .. 4000 nm
- · 40 GHz mode-hopfree tuning
- · Up to 2000 mW
- · Linewidth < 1 MHz



Rack-Integrated Systems

- · 19-inch-standard subracks
- · Compact and transportable
- Fiber-coupled ECDL
 and DFB lasers
- Drawer slide design enables quick access



Guide Star Laser

- · 589 nm
- · Up to 22 W
- · Repumper included
- · Linewidth < 5 MHz
- · RMS wavefront < 25 nm
- · Power consumption 700 W


ULTRAFAST FIBER LASERS

IDEAL FOR

Nonlinear Optics and Microscopy Multi-photon Microscopy **Broadband Spectroscopy** Time-resolved Spectroscopy Pump-probe Spectroscopy Material Inspection Material Processing Terahertz Spectroscopy Two-photon Polymerization

TOPTICA's femtosecond and picosecond fiber lasers combine robust fiber-laser technology with outstanding laser engineering to provide easy-to-use and turnkey laser engines that are tailored to a diverse array of applications. Based on a modular

design concept, TOPTICA's portfolio of Ytterbium-doped and Erbium-doped fiber lasers ranges from low-power seed oscillators for OEM integrators, to complete laser solutions for state-of-the-art research applications, to high-power laser systems for applications in material processing. Using sophisticated methods, TOPTICA is capable of offering laser engines for All Wavelengths, covering the UV to infrared spectral range.

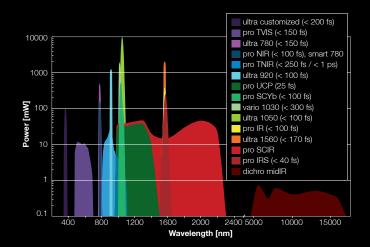



FemtoFiber ultra

- · 780, 920, 1050, 1560 nm
- · Up to 10 Watt
- · Down to 100 fs
- · 80 MHz
- · All air-cooled



FemtoFiber pro/dichro

- · Reliable mode-locking
- · 390 nm .. 15000 nm
- · Up to 350 mW
- · Down to 25 fs
- · Custom-tailored configurations



FemtoFiber smart

- · 1030, 1064, 1550, 1950 nm · 1030 nm
- · Up to 50 mW
- · 400 fs, 800 fs, 6 ps
- · 20, 30, 100 MHz
- · Cost effective



FemtoFiber vario

- · 2 µJ
- $\cdot < 300 \text{ fs}$
- · 1 MHz down to single pulse
- Variable laser characteristics

FREQUENCY COMBS

TERAHERTZ SYSTEMS

IDEAL FOR

Laser Reference **Optical Clocks** High-resolution Spectroscopy Microwave Generation

TOPTICA's Difference Frequency Comb (DFC) is a compact, robust, high-end solution featuring turn-key operation in a 19-inch format. All

driving and locking electronics for RF references are integrated into the robust 19-inch housing of the Erbium-fiber-based frequency comb DFC CORE. It features 4 or optionally 8 intrinsically carrier envelop offset-free (f_{DEO}=0) outputs at 1560 nm which can be equipped with wavelength extension modules (DFC EXT) converting the comb light to any wavelength between 420 nm and 2200 nm.

With its intrinsic stability and ease of use the DFC is the number one choice for anyone looking for high-end performance combined with a high level of robustness.



DFC CORE+

- · Compact high-performance frequency comb
- · Turn-key operation
- · Intrinsically stable
- · Ultra-low phase noise
- · Highest stability



DFC SDL


- · Frequency-comb-stabilized laser systems
- · All from one single source
- · Designed to work together
- · Convenient user interface
- · Ready to work from day one

IDEAL FOR

Terahertz Spectroscopy Non-destructive Testing Layer Thickness Measurements Material Research

TOPTICA has become one of the most successful suppliers of terahertz technologies worldwide. The portfolio includes continuous-wave systems

with outstanding frequency resolution, as well as versatile time-domain instruments with ultrabroad bandwidth and unprecedented measurement speed.

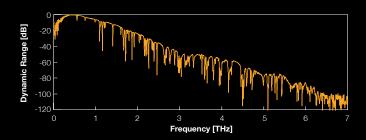





TeraScan

- · Frequency-domain THz system · Time-domain THz systems
- · Up to 3 THz, peak dynamic range > 90 dB
- · Frequency resolution < 10 MHz
- · Ideal for high-resolution spectroscopy

TeraFlash pro/smart

- \cdot TF pro: Up to 6 THz, > 90 dB
- · TF smart: 1600 pulse traces per second
- · Robust, high-performance systems ready for industrial use

TOPTICA Worldwide

Australia & New Zealand

Lastek Pty. Ltd. www.lastek.com.au

France

Opton Laser International www.optonlaser.com

India

Simco Global Technology & Systems Ltd.

www.simco-groups.com

Israe

Lahat Technologies Ltd. www.lahat.com

Russia

EuroLase Ltd.

Singapore & Malaysia & Thailand

Precision Technologies Pte Ltd www.pretech.com.sg

South Kores

JINSUNG INSTRUMENTS, INC. www.jinsunginst.com

Taiwan

Luxton Inc. www.luxton.com.tw

United Kingdom & Ireland

TOPTICA Photonics UK www.toptica.com

TOPTICA Photonics AG

Lochhamer Schlag 19 D-82166 Graefelfing / Munich Germany

Phone: +49 89 85837 0 Fax: +49 89 85837 200 sales@toptica.com www.toptica.com

TOPTICA Photonics, K.K.

2-9-5, Miyanishi-cho Fuchu-shi Tokyo, 183-0022 Japan

Phone: +81 42 306 9906 Fax: +81 42 306 9907 sales@toptica-japan.com www.toptica.co.jp

TOPTICA Photonics Inc

5847 County Road 41 Farmington, NY 14425 U.S.A. & Canada & Mexico

Phone: +1 585 657 6663 Fax: +1 877 277 9897 sales@toptica-usa.com www.toptica.com

TOPTICA Photonics (China) Co., Ltd.

Room 1837, Bund Centre 222 East YanAn Rd Huangpu District Shanghai, 200333

China

Phone: +86 21 619 335 09 toptica@toptica-china.com www.toptica-china.com

